


DP086LA

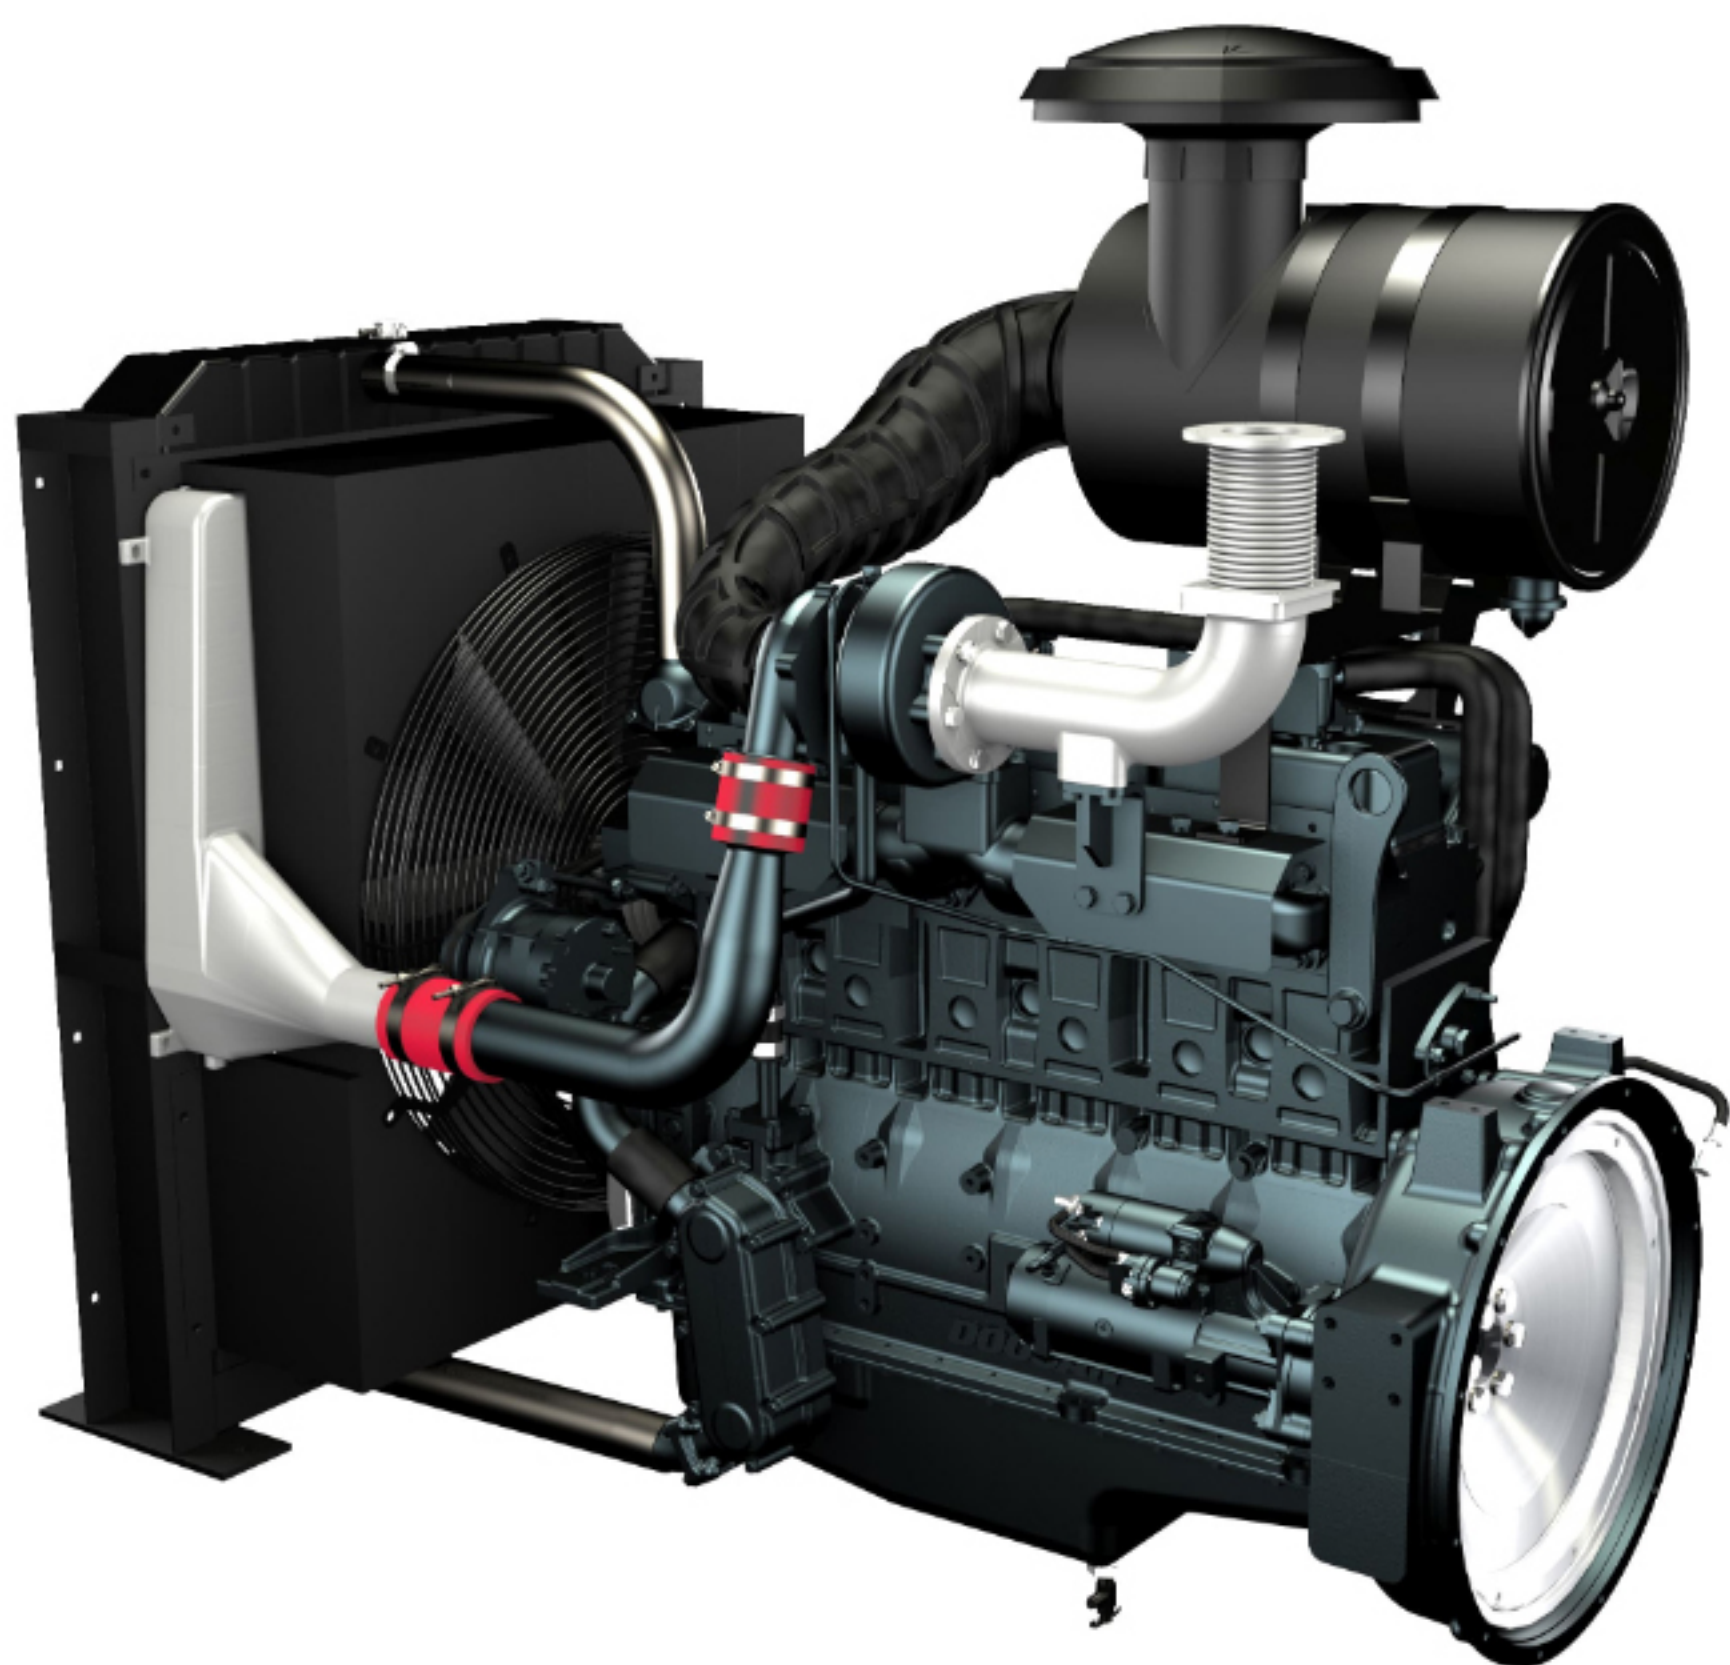

Cylinder

L6

Displacement

8.1 ℓ

Maximum Rating

253 kW

Overview

DP086LA

An 8-liter engine (maximum output: 253 kW) for an inline, 6-cylinder, turbo/intercooler generator

DP Engine

Our engines are mounted on emergency/commercial generators and are recognized for their high output and durability, so they are supplied all over the world. They are characterized by convenience in maintenance, high performance, and high fuel efficiency, meeting customers’ requirements.

Handiness of maintenance and high performance

User convenience - high fuel efficiency and being easy to install

Specifications

Classification	DP086LA
Cylinder	L6
Displacement	8.1 ℓ
Maximum Rating	253 kW
Minimum Rating	201 kW
Aspiration	TI
Bore x Stroke	111 × 139 mm
kW(ps)/rpm 50Hz Standby*	224(305) @ 1,500
kW(ps)/rpm 50Hz Prime*	201(273) @ 1,500
kW(ps)/rpm 60Hz Standby*	253(344) @ 1,800
kW(ps)/rpm 60Hz Prime*	228(310) @ 1,800
Dimension (L × W × H)	1242 × 746 × 1113 mm
Dry Weight	790 kg
Emissions	-