


DP158LC

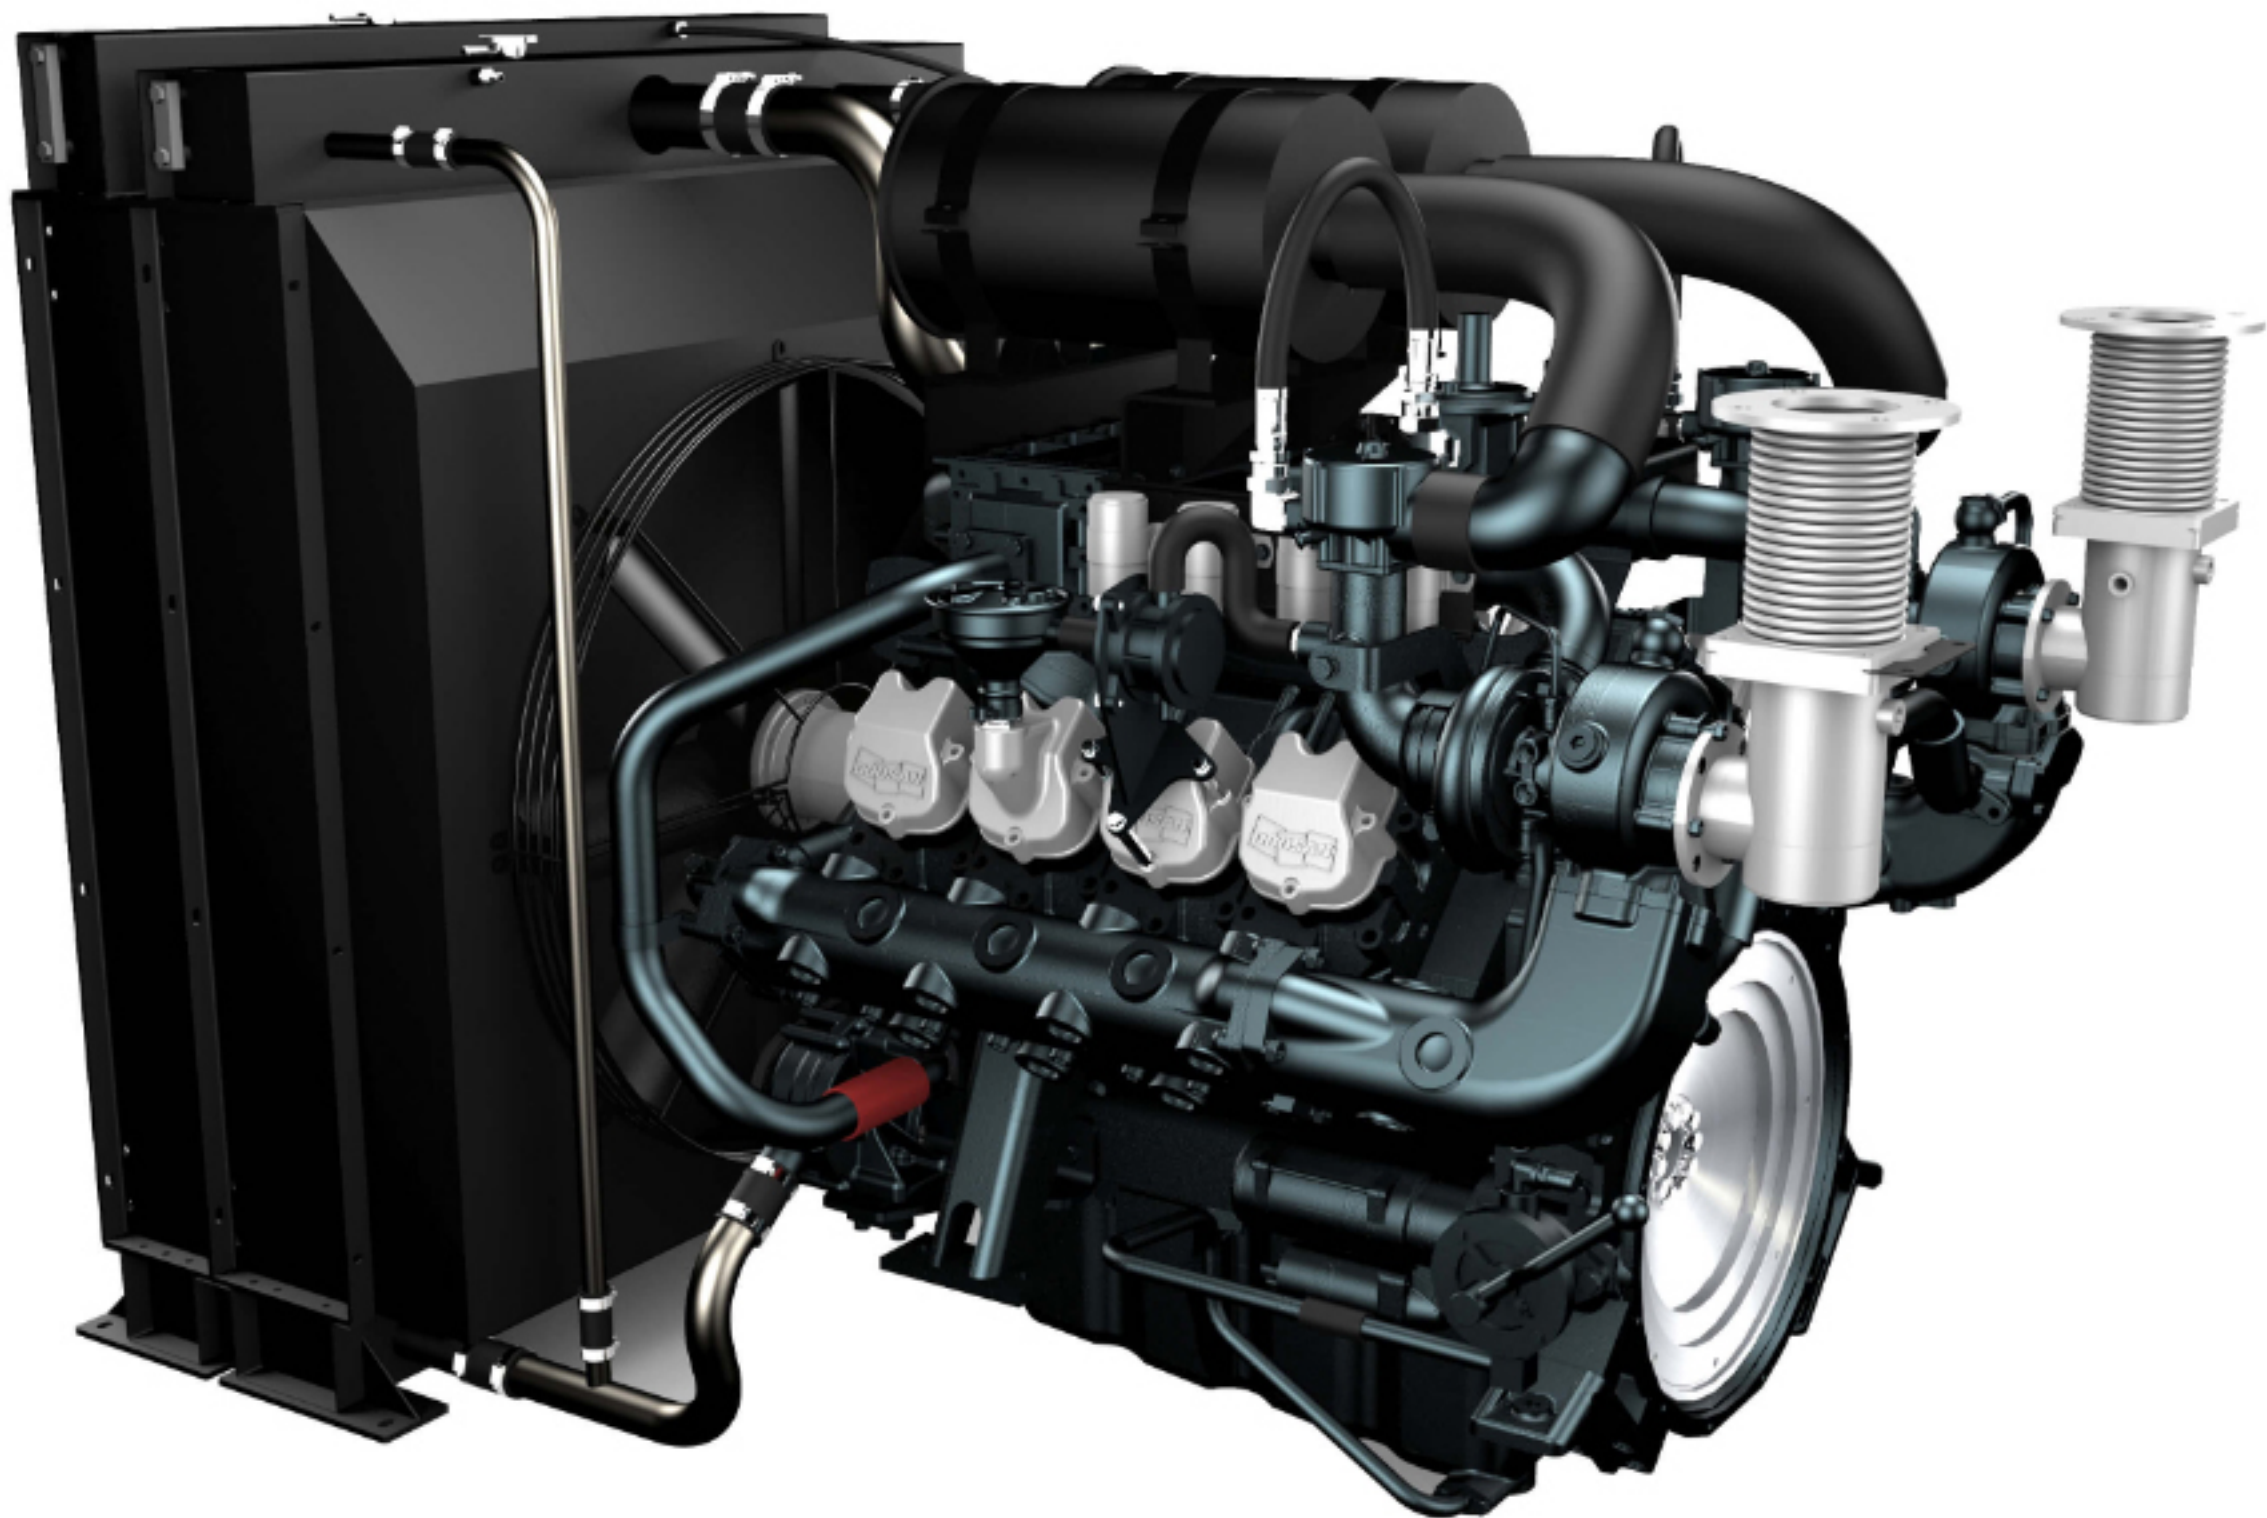

 Cylinder	 Displacement	 Maximum Rating
V8	14.6 ℓ	513 kW

Overview

DP158LC

A 15-liter engine (maximum output: 513 kW) for an inline, V-type, 8-cylinder, turbo/intercooler generator

DP Engine

Our engines are mounted on emergency/commercial generators and are recognized for their high output and durability, so they are supplied all over the world. They are characterized by convenience in maintenance, high performance, and high fuel efficiency, meeting customers’ requirements.

Handiness of maintenance and high performance

User convenience - high fuel efficiency and being easy to install

Specifications

Classification	DP158LC
Cylinder	V8
Displacement	14.6 ℓ
Maximum Rating	513 kW
Minimum Rating	408 kW
Aspiration	Tl
Bore x Stroke	128 × 142 mm
kW(ps)/rpm 50Hz Standby*	449(610) @ 1,500
kW(ps)/rpm 50Hz Prime*	408(555) @ 1,500
kW(ps)/rpm 60Hz Standby*	513(697) @ 1,800
kW(ps)/rpm 60Hz Prime*	466(634) @ 1,800
Dimension (L × W × H)	1,274 × 1,138 × 1,207 mm
Dry Weight	1,155 kg
Emissions	-