


DP158LD

Non-Tier

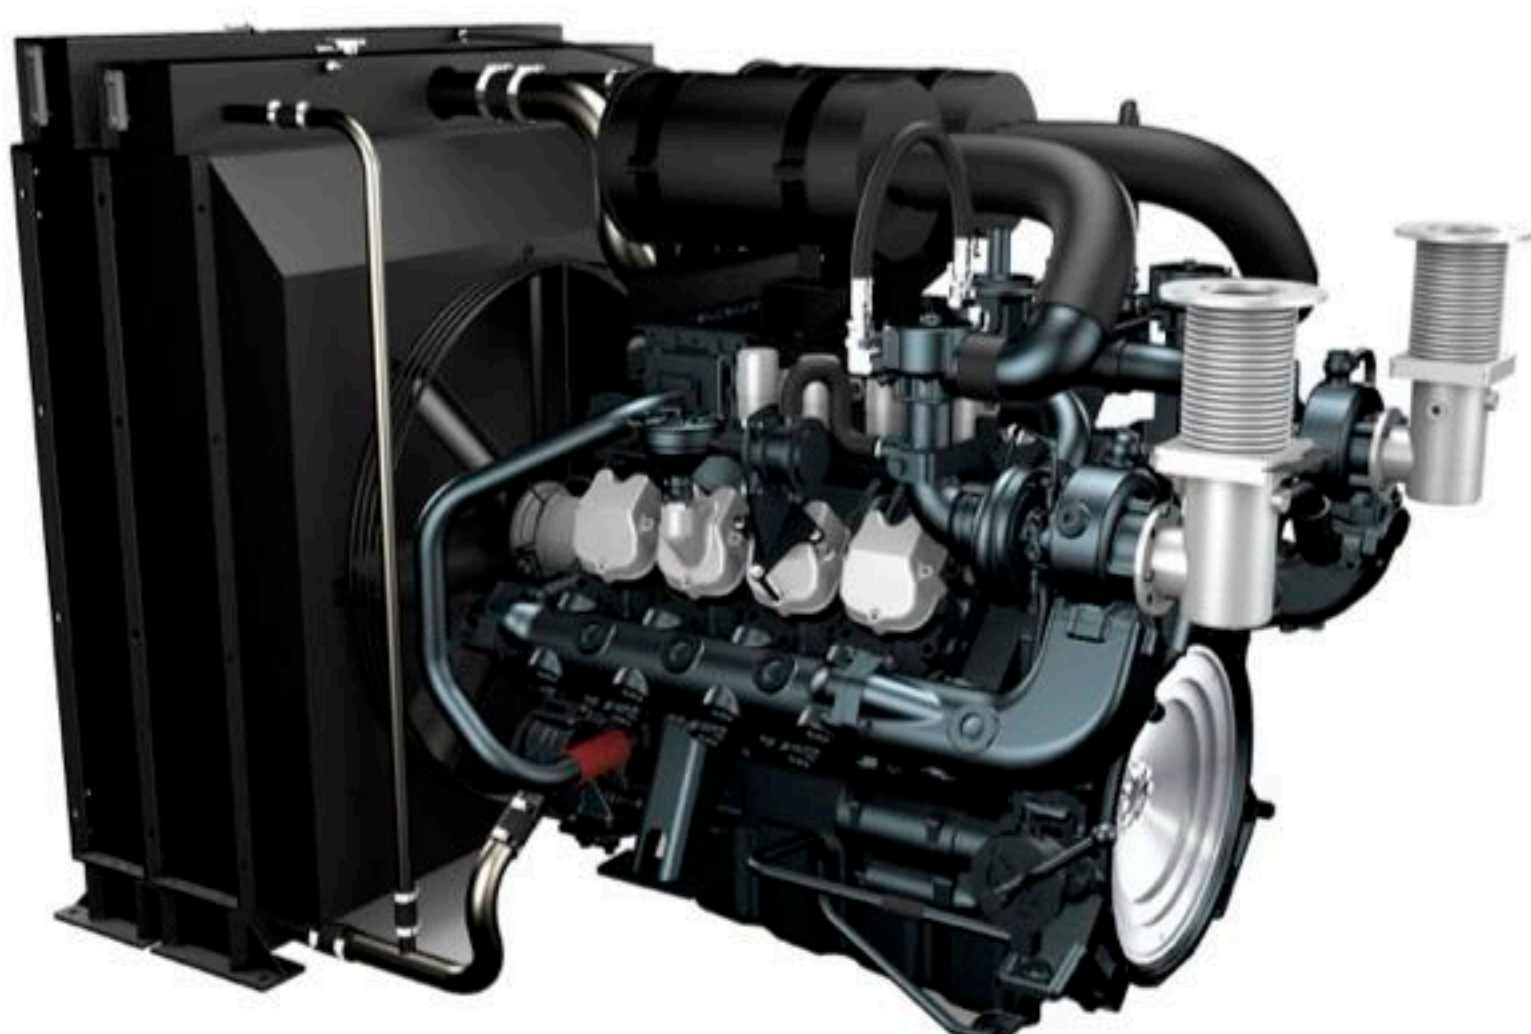

 Cylinder

 Displacement

 Maximum Rating

V814.6 ℓ556 kWm

Overview

DP158LD	A 15-liter engine (maximum output: 556 kWm) for a V-type, 8-cylinder, turbo/intercooler generator
DP Engine	Our engines are mounted on emergency/commercial generators and are recognized for their high output and durability, so they are supplied all over the world. They are characterized by convenience in maintenance, high performance, and high fuel efficiency, meeting customers’ requirements. .
Handiness of maintenance and high performance	User convenience - high fuel efficiency and being easy to install

Specifications

Classification	DP158LD
Cylinder	V8
Displacement	14.6 ℓ
Maximum Rating	556 kWm
Minimum Rating	464 kWm
Aspiration	Turbo Charger & Inter Cooler
Bore x Stroke	128 x 142 mm
kWm @ rpm 50Hz Standby	510 @ 1,500
kWm @ rpm 50Hz Prime	464 @ 1,500
kWm @ rpm 60Hz Standby	556 @ 1,800
kWm @ rpm 60Hz Prime	505 @ 1,800
Dimension (L × W × H)	1,381 x 1,138 x 1,207 mm
Dry Weight	1,155 kg
Emissions	Non-Tier