


P126TI-II

Tier 2

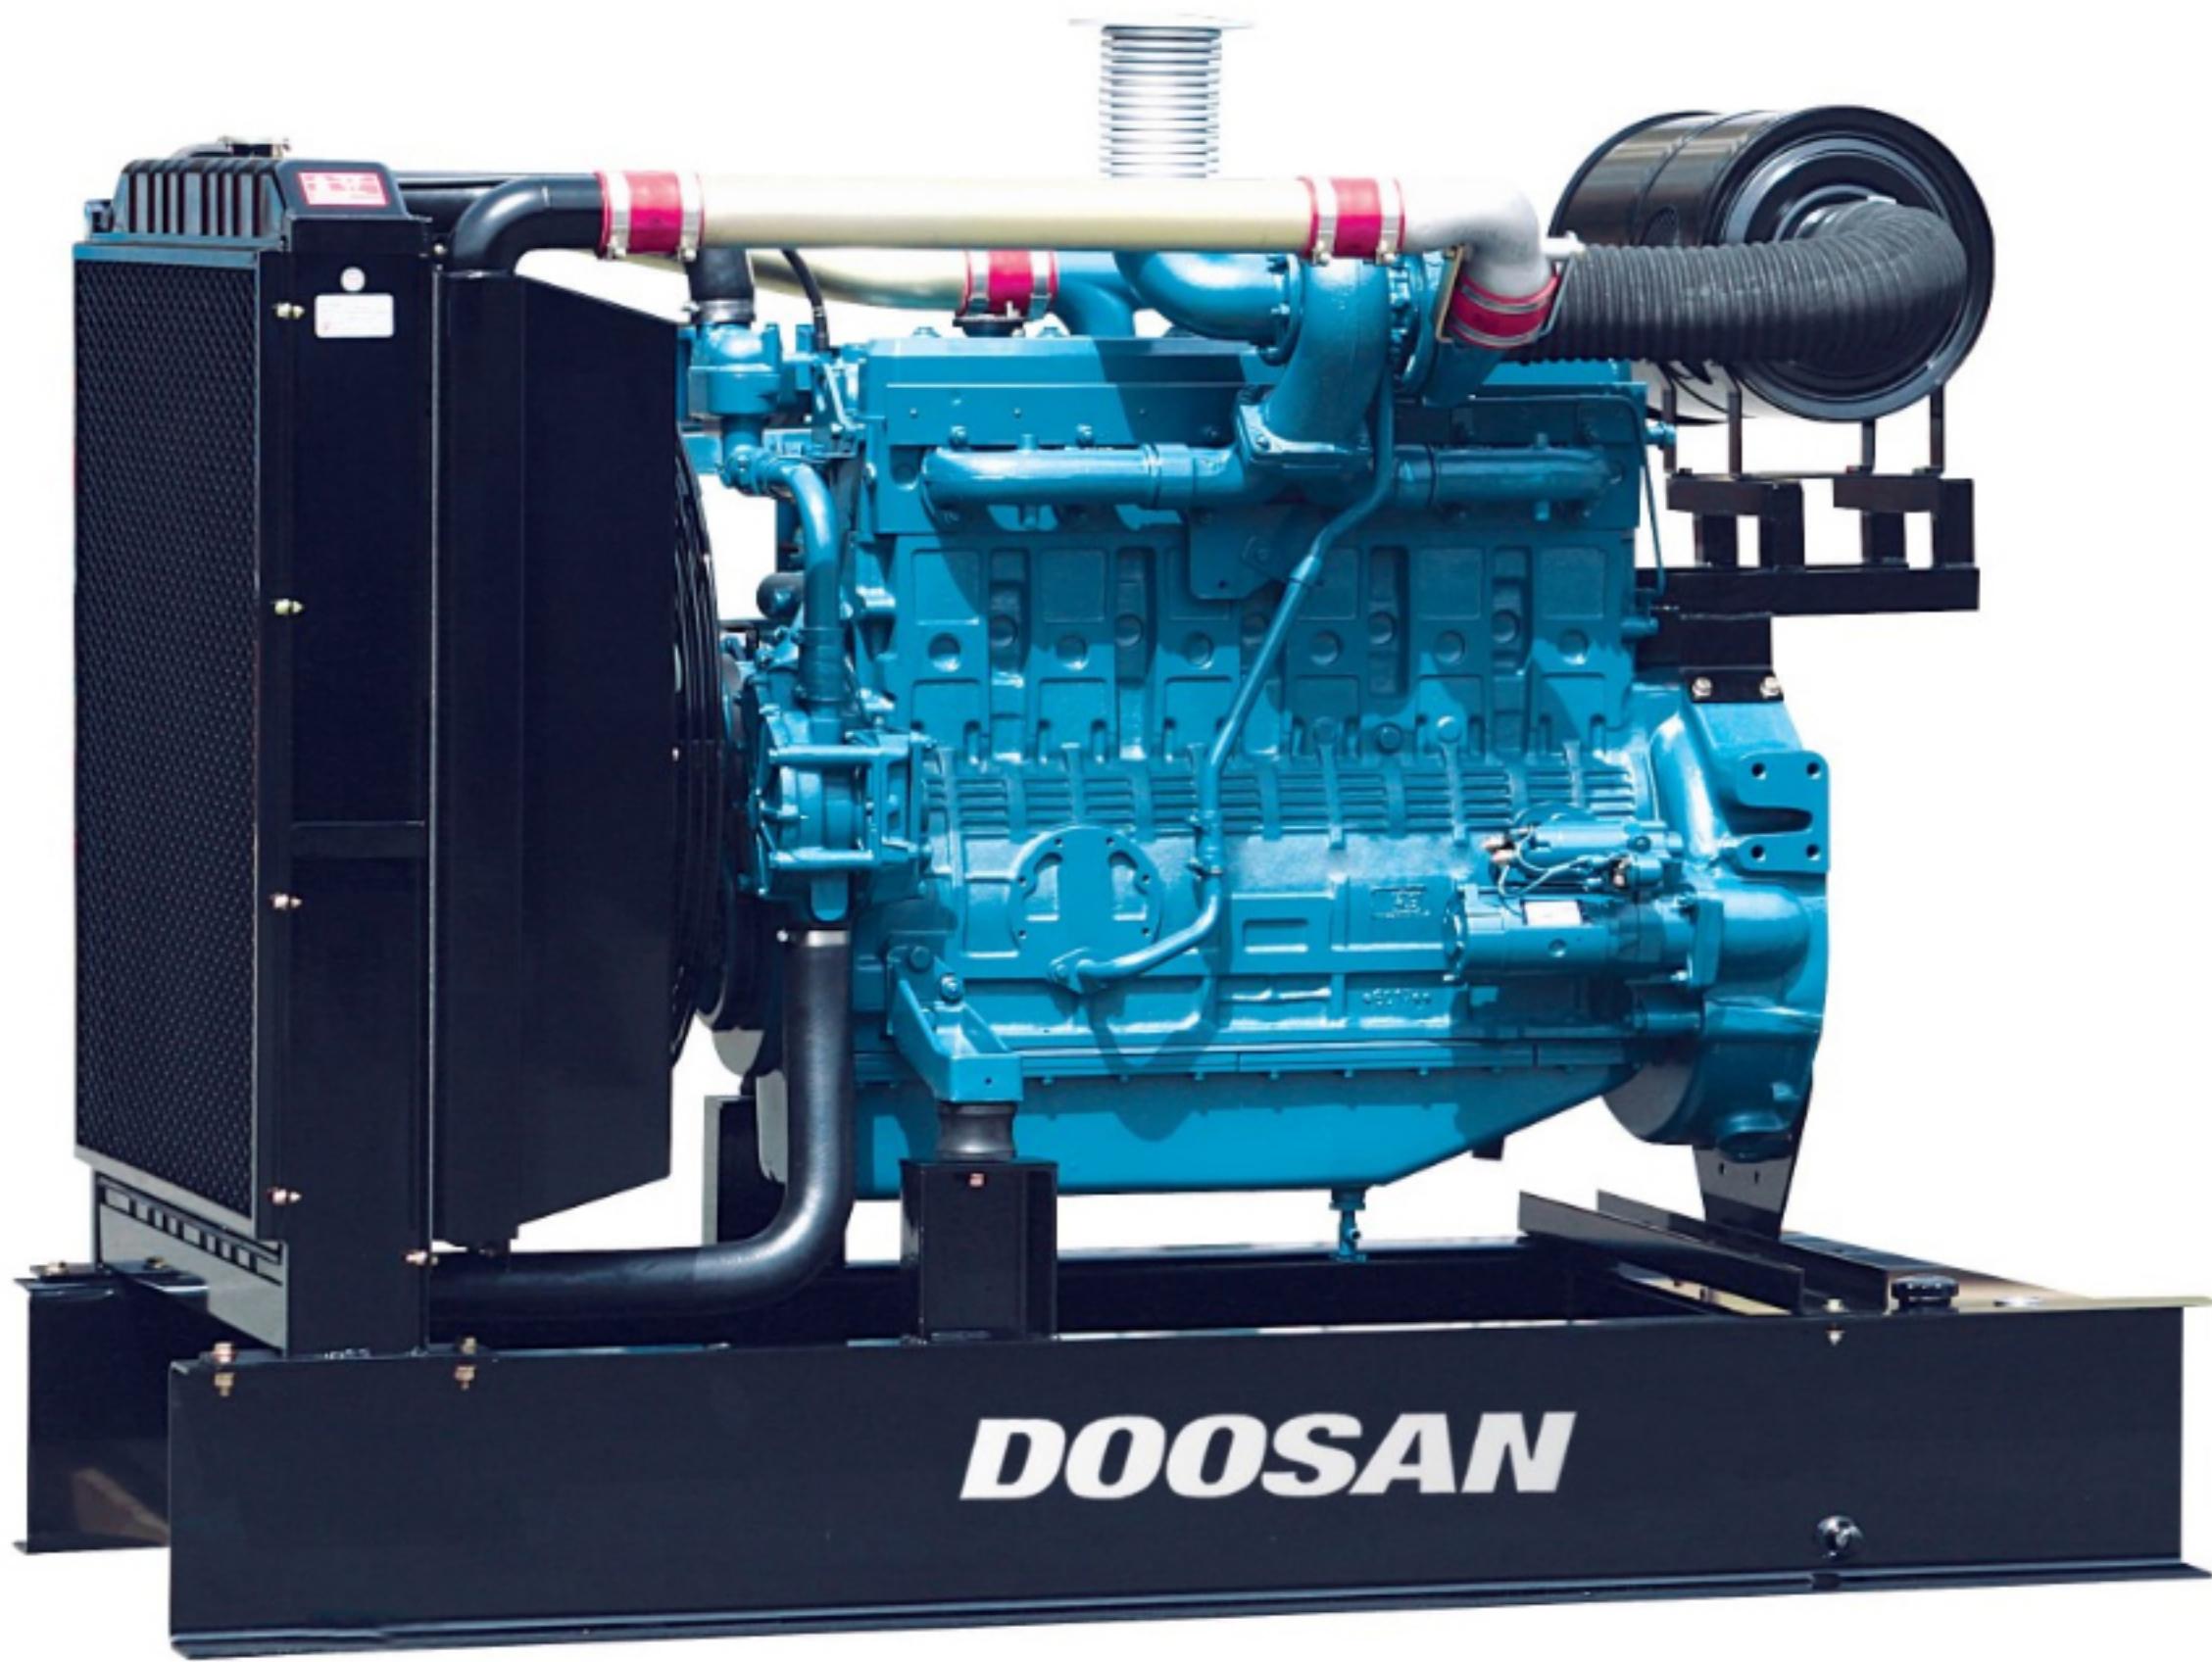

 Cylinder	 Displacement	 Maximum Rating
L6	11.1 ℓ	342 kW

Overview

P126TI-II	An 11-liter engine (maximum output: 342 kW) for an inline, six-cylinder, turbo/intercooler generator
DP Engine	The P Series is our basic lineup of mid/large-sized generators. Our engines are mounted on emergency/commercial generators and are recognized for their high output and durability, so they are supplied all over the world. They are characterized by convenience in maintenance, high performance, and high fuel efficiency, meeting customers’ requirements.
Handiness of maintenance and high performance	User convenience - high fuel efficiency and being easy to install

Specifications

Classification	P126TI-II
Cylinder	L6
Displacement	11.1 ℓ
Maximum Rating	342 kW
Minimum Rating	265 kW
Aspiration	TI
Bore x Stroke	123 × 155 mm
kW(ps)/rpm 50Hz Standby*	294(400) @ 1,500
kW(ps)/rpm 50Hz Prime*	265(360) @ 1,500
kW(ps)/rpm 60Hz Standby*	342(465) @ 1,800
kW(ps)/rpm 60Hz Prime*	307(418) @ 1,800
Dimension (L × W × H)	1,384 × 1,109 × 1,195 mm
Dry Weight	915 kg
Emissions	Tier 2