


P158LE

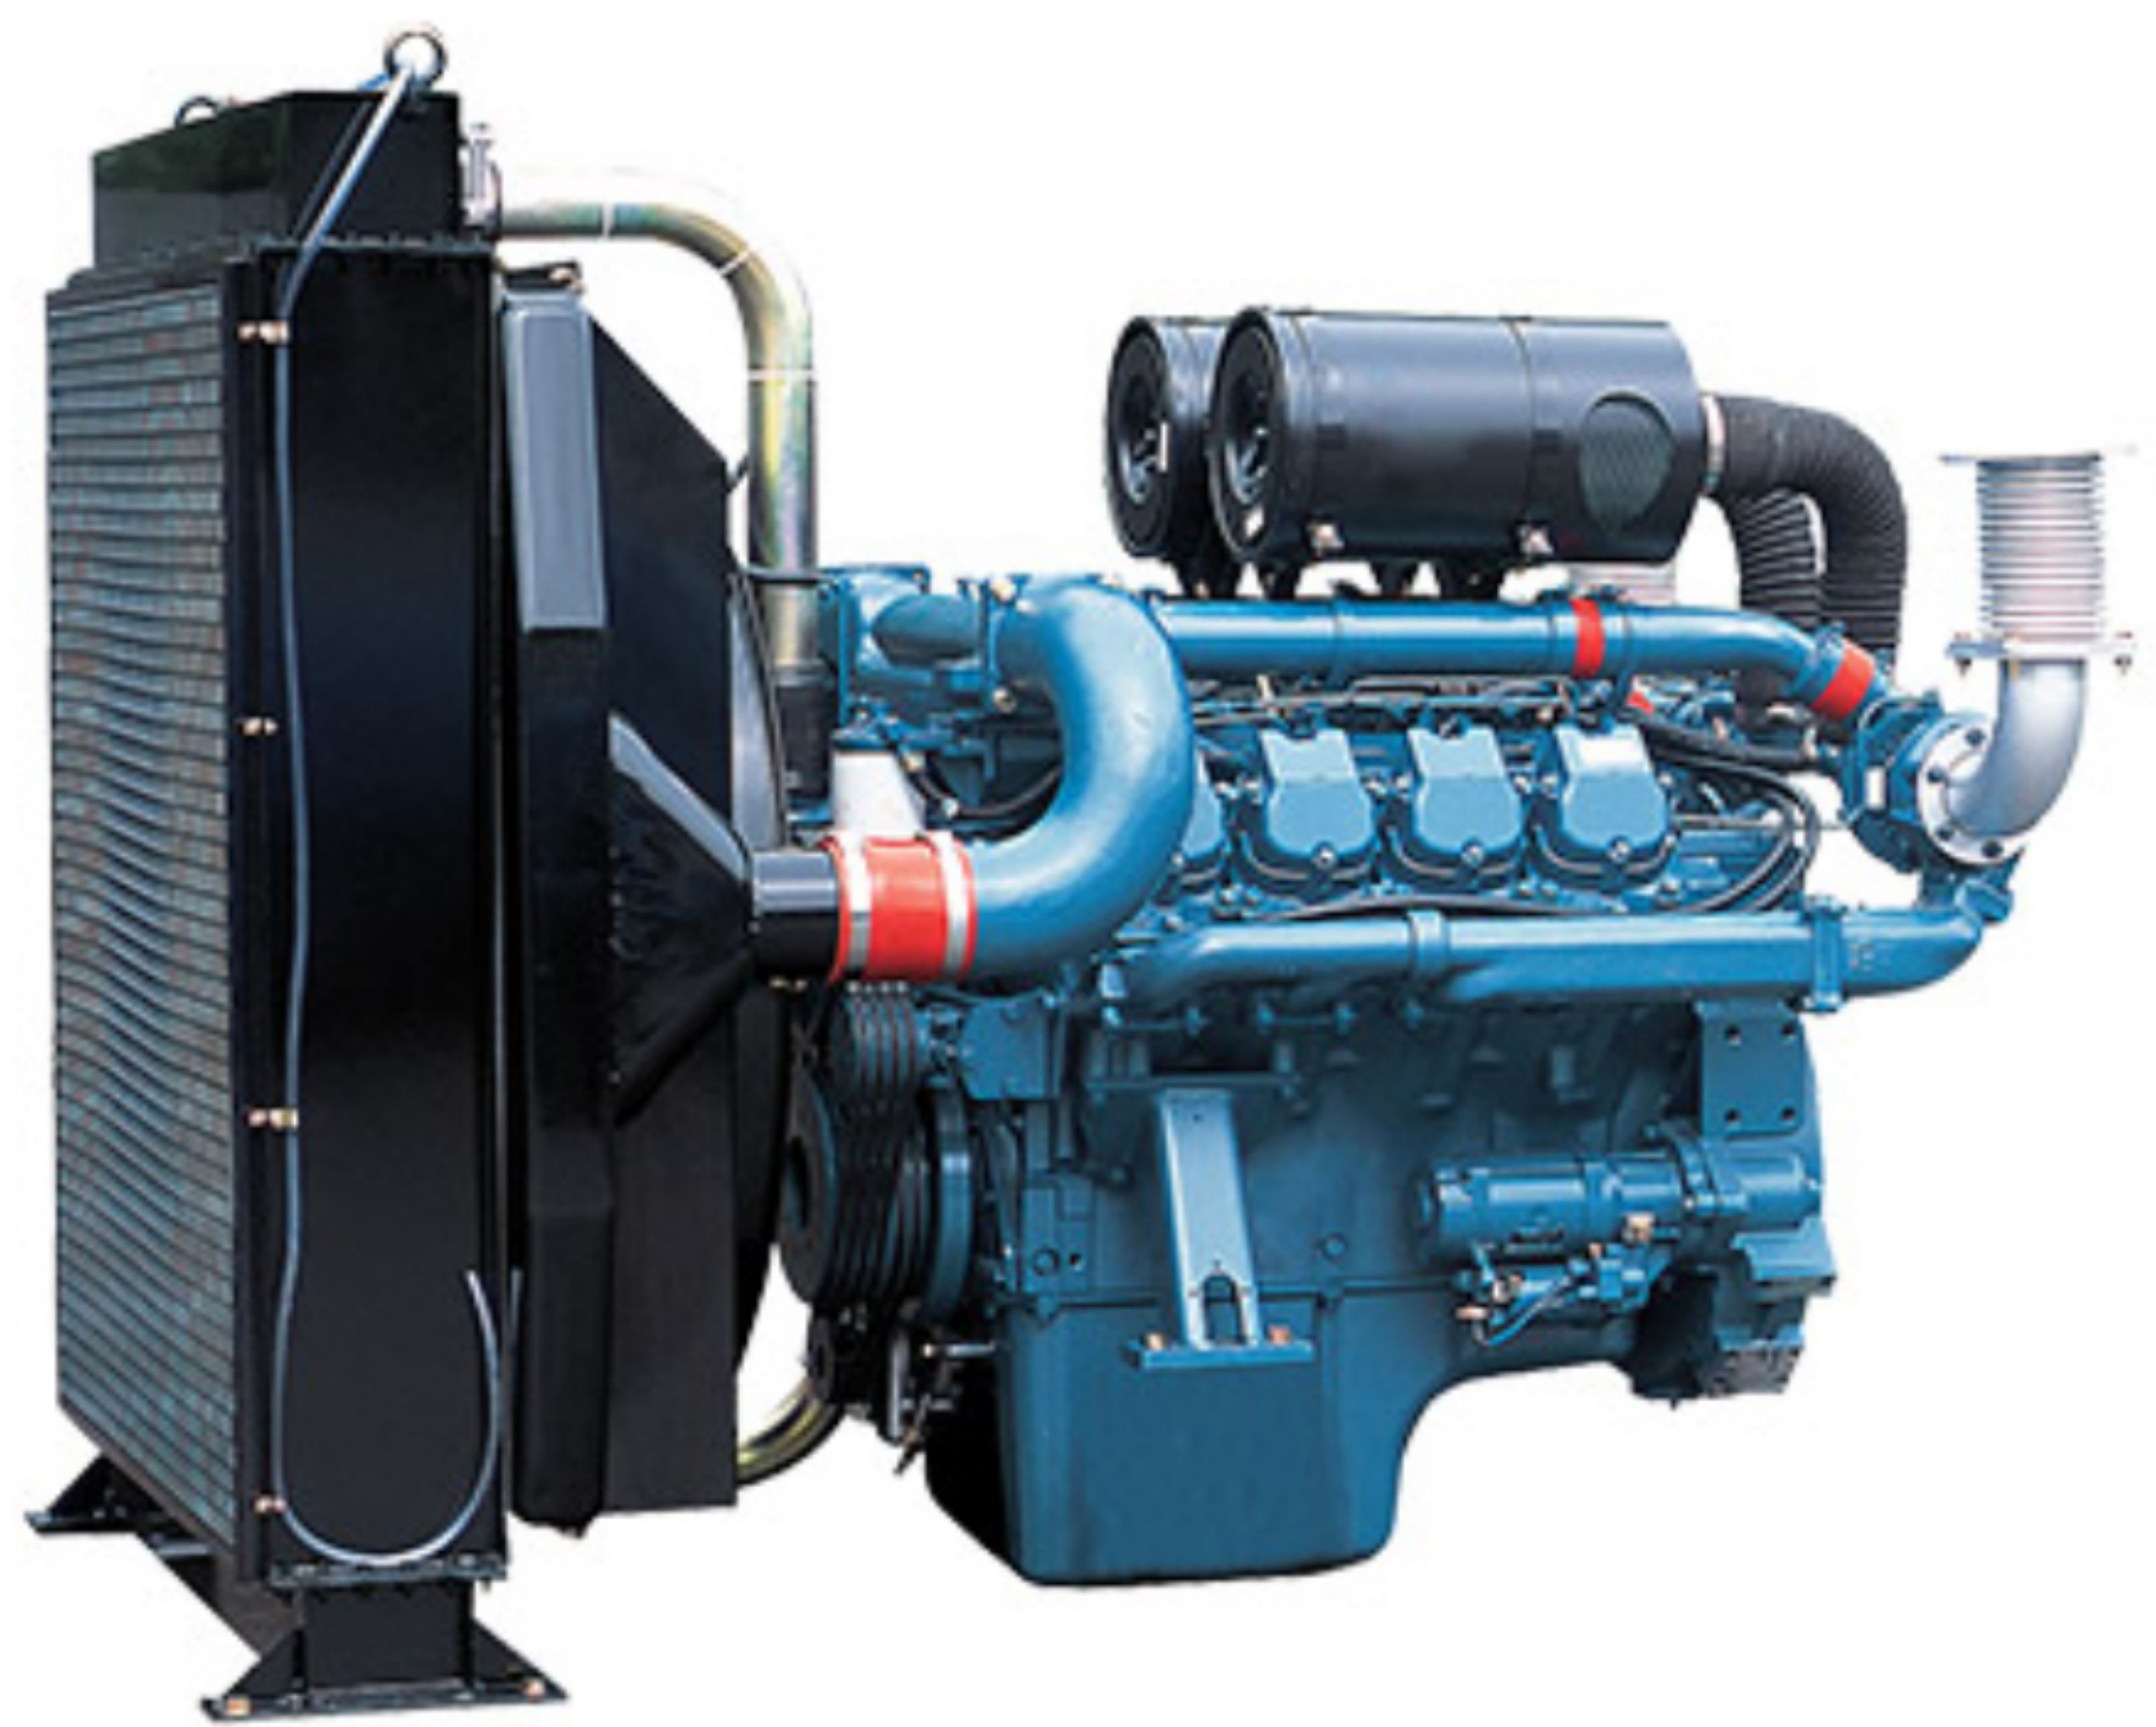

 Cylinder	 Displacement	 Maximum Rating
V8	14.6 ℓ	458 kW

Overview

P158LE

A 15-liter engine (maximum output: 458 kW) for a V-type, 8-cylinder, turbo/intercooler generator

DP Engine

The P series is our basic lineup of mid/large-sized generators. Our engines are mounted on emergency/commercial generators and are recognized for their high output and durability, so they are supplied all over the world. They are characterized by convenience in maintenance, high performance, and high fuel efficiency, meeting customers’ requirements.

Handiness of maintenance and high performance

User convenience - high fuel efficiency and being easy to install

Specifications

Classification	P158LE
Cylinder	V8
Displacement	14.6 ℓ
Maximum Rating	458 kW
Minimum Rating	363 kW
Aspiration	TI
Bore x Stroke	128 × 142 mm
kW(ps)/rpm 50Hz Standby*	414(563) @ 1,500
kW(ps)/rpm 50Hz Prime*	363(494) @ 1,500
kW(ps)/rpm 60Hz Standby*	458(623) @ 1,800
kW(ps)/rpm 60Hz Prime*	402(547) @ 1,800
Dimension (L × W × H)	1,389 × 1,389 × 1,216 mm
Dry Weight	950 kg
Emissions	Tier 1